



# **AiP74LVC1G125**

## **Single Buffer/Line Driver; 3-state**

# **Product Specification**

### **Specification Revision History:**

<b>Version</b>	<b>Date</b>	<b>Description</b>
2017-07-A1	2017-07	New
2023-03-B1	2023-03	Update template
2023-10-B2	2023-10	Additional package



# Contents

<b>1、 General Description.....</b>	<b>3</b>
<b>2、 Block Diagram And Pin Description .....</b>	<b>4</b>
2.1、 Block Diagram .....	4
2.2、 Pin Configurations .....	4
2.3、 Pin Description.....	5
2.4、 Function Table .....	5
<b>3、 Electrical Parameter .....</b>	<b>5</b>
3.1、 Absolute Maximum Ratings.....	5
3.2、 Recommended Operating Conditions .....	5
3.3、 Electrical Characteristics.....	6
3.3.1、 DC Characteristics 1 .....	6
3.3.2、 DC Characteristics 2.....	7
3.3.3、 AC Characteristics 1 .....	8
3.3.4、 AC Characteristics 2.....	8
<b>4、 Testing Circuit .....</b>	<b>9</b>
4.1、 AC Testing Circuit.....	9
4.2、 AC Testing Waveforms.....	9
4.3、 Measurement Points .....	10
4.4、 Test Data .....	10
<b>5、 Package Information .....</b>	<b>11</b>
5.1、 SOT-23-5 .....	11
5.2、 SOT-353 .....	12
5.3、 XSON6(1*1*0.45-0.35) .....	13
<b>6、 Statements And Notes .....</b>	<b>15</b>
6.1、 The name and content of Hazardous substances or Elements in the product .....	15
6.2、 Notes.....	15



## 1、 General Description

The AiP74LVC1G125 provides one non-inverting buffer/line driver with 3-state output. The 3-state output is controlled by the output enable input ( $\overline{OE}$ ). A HIGH-level at pin  $\overline{OE}$  causes the output to assume a high-impedance OFF-state.

The input can be driven from either 3.3V or 5V devices. This feature allows the use of this device in a mixed 3.3V and 5V environment.

### Features:

- Supply voltage range: 1.65V to 5.5V
- $\pm 24\text{mA}$  output drive ( $V_{CC}=3.0\text{V}$ )
- CMOS low power consumption
- Temperature range:  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- Packaging information: SOT-23-5/SOT-353/XSON6

### Ordering Information:

#### Reel packing specifications:

Part number	Packaging form	Marking code	Reel quantity	Boxed reel quantity	Notes
AiP74LVC1G125GB235.TR	SOT-23-5	ACXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.9mm×1.6mm Pin spacing: 0.95mm
AiP74LVC1G125GC353.TR	SOT-353	ACXX	3000 PCS/reel	30000 PCS/box	Dimensions of plastic enclosure: 2.1mm×1.3mm Pin spacing: 0.65mm
AiP74LVC1G125ED6.TR	XSON6	ACXX	5000 PCS/reel	25000 PCS/box	Dimensions of plastic enclosure: 1.0mm×1.0mm Pin spacing: 0.35mm

Note 1: "XX" refers to variable content, meaning year and package batch serial number.

Note 2: If the physical information is inconsistent with the ordering information, please refer to the actual product.



## 2、Block Diagram And Pin Description

### 2.1、Block Diagram



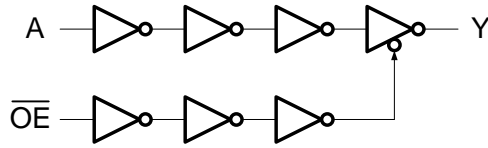


Figure 1. Logic diagram

### 2.2、Pin Configurations

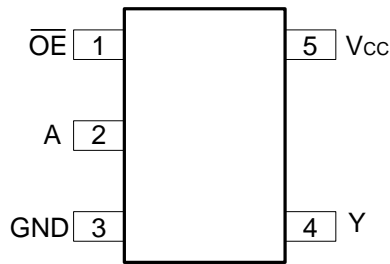

SOT23-5/SOT353

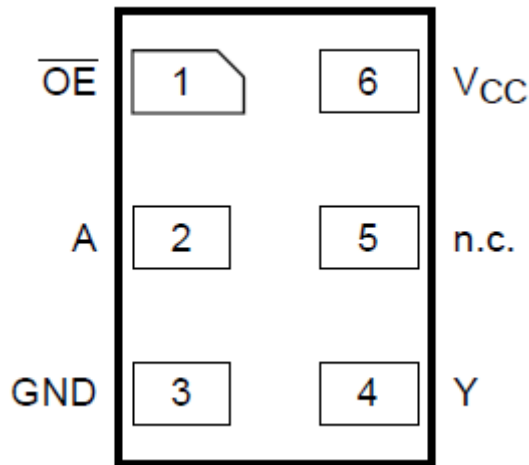

XSON6



## 2.3、Pin Description

Pin No. SOT23-5/SO T353	Pin No. XSON6	Pin Name	Description
1	1	$\overline{\text{OE}}$	output enable input
2	2	A	data input
3	3	GND	ground (0V)
4	4	Y	data output
-	5	n.c.	not connected
5	6	V <sub>CC</sub>	supply voltage

## 2.4、Function Table

Input		Output
OE	A	Y
L	L	L
L	H	H
H	X	Z

Note: H=HIGH voltage level; L=LOW voltage level; X=don't care; Z=high-impedance OFF-state.

## 3、Electrical Parameter

### 3.1、Absolute Maximum Ratings

(Voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Max.	Unit
supply voltage	V <sub>CC</sub>	-	-0.5	+6.5	V
input clamping current	I <sub>IK</sub>	V <sub>I</sub> < 0V	-50	-	mA
input voltage	V <sub>I</sub>	-	-0.5	+6.5	V
Output clamping current	I <sub>OK</sub>	V <sub>O</sub> > V <sub>CC</sub> or V <sub>O</sub> < 0V	-	±50	mA
output voltage	V <sub>O</sub>	Active mode	-0.5	V <sub>CC</sub> +0.5	V
		Power-down mode	-0.5	+6.5	V
output current	I <sub>O</sub>	V <sub>O</sub> =0V to V <sub>CC</sub>	-	±50	mA
supply current	I <sub>CC</sub>	-	-	100	mA
ground current	I <sub>GND</sub>	-	-100	-	mA
storage temperature	T <sub>stg</sub>	-	-65	+150	°C
soldering temperature	T <sub>L</sub>	10s	260		°C

### 3.2、Recommended Operating Conditions

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
supply voltage	V <sub>CC</sub>	-	1.65	-	5.5	V
input voltage	V <sub>I</sub>	-	0	-	5.5	V



output voltage	V <sub>O</sub>	Active mode	0	-	V <sub>CC</sub>	V
		Power-down mode; V <sub>CC</sub> =0V	0	-	5.5	V
ambient temperature	T <sub>amb</sub>	-	-40	-	+125	°C

### 3.3、Electrical Characteristics

#### 3.3.1、DC Characteristics 1

(T<sub>amb</sub>=-40°C to +85°C, voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
HIGH-level input voltage	V <sub>IH</sub>	V <sub>CC</sub> =1.65V to 1.95V	0.65× V <sub>CC</sub>	-	-	V	
		V <sub>CC</sub> =2.3V to 2.7V	1.7	-	-	V	
		V <sub>CC</sub> =2.7V to 3.6V	2.0	-	-	V	
		V <sub>CC</sub> =4.5V to 5.5V	0.7× V <sub>CC</sub>	-	-	V	
LOW-level input voltage	V <sub>IL</sub>	V <sub>CC</sub> =1.65V to 1.95V	-	-	0.35× V <sub>CC</sub>	V	
		V <sub>CC</sub> =2.3V to 2.7V	-	-	0.7	V	
		V <sub>CC</sub> =2.7V to 3.6V	-	-	0.8	V	
		V <sub>CC</sub> =4.5V to 5.5V	-	-	0.3× V <sub>CC</sub>	V	
HIGH-level output voltage	V <sub>OH</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>O</sub> =-100uA; V <sub>CC</sub> =1.65V to 5.5V	V <sub>CC</sub> - 0.1	-	-	V
			I <sub>O</sub> =-4mA; V <sub>CC</sub> =1.65V	1.2	-	-	V
			I <sub>O</sub> =-8mA; V <sub>CC</sub> =2.3V	1.9	-	-	V
			I <sub>O</sub> =-12mA; V <sub>CC</sub> =2.7V	2.2	-	-	V
			I <sub>O</sub> =-24mA; V <sub>CC</sub> =3.0V	2.3	-	-	V
			I <sub>O</sub> =-32mA; V <sub>CC</sub> =4.5V	3.8	-	-	V
LOW-level output voltage	V <sub>OL</sub>	V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub>	I <sub>O</sub> =100uA; V <sub>CC</sub> =1.65V to 5.5V	-	-	0.10	V
			I <sub>O</sub> =4mA; V <sub>CC</sub> =1.65V	-	-	0.45	V
			I <sub>O</sub> =8mA; V <sub>CC</sub> =2.3V	-	-	0.30	V
			I <sub>O</sub> =12mA; V <sub>CC</sub> =2.7V	-	-	0.40	V
			I <sub>O</sub> =24mA; V <sub>CC</sub> =3.0V	-	-	0.55	V
			I <sub>O</sub> =32mA; V <sub>CC</sub> =4.5V	-	-	0.55	V
input leakage current	I <sub>I</sub>	V <sub>I</sub> =5.5V or GND; V <sub>CC</sub> =0V to 5.5V	-	-	±2	uA	
OFF-state output current	I <sub>OZ</sub>	V <sub>I</sub> =V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> =5.5V or GND; V <sub>CC</sub> =3.6V	-	-	±2	uA	
power-off leakage current	I <sub>OFF</sub>	V <sub>I</sub> or V <sub>O</sub> =5.5V; V <sub>CC</sub> =0V	-	-	±2	uA	
supply current	I <sub>CC</sub>	V <sub>I</sub> =5.5V or GND; I <sub>O</sub> =0A; V <sub>CC</sub> =1.65V to 5.5V	-	-	2	uA	
additional supply current	ΔI <sub>CC</sub>	per pin; V <sub>I</sub> =V <sub>CC</sub> -0.6V; I <sub>O</sub> =0A; V <sub>CC</sub> =2.3V to 5.5V	-	-	500	uA	

Note: All typical values are measured at V<sub>CC</sub>=3.3V and T<sub>amb</sub>=25°C.



## 3.3.2、DC Characteristics 2

( $T_{amb}=-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
HIGH-level input voltage	$V_{IH}$	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	$0.65 \times V_{CC}$	-	-	V	
		$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	1.7	-	-	V	
		$V_{CC}=2.7\text{V}$ to $3.6\text{V}$	2.0	-	-	V	
		$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	$0.7 \times V_{CC}$	-	-	V	
LOW-level input voltage	$V_{IL}$	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	$0.35 \times V_{CC}$	V	
		$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	0.7	V	
		$V_{CC}=2.7\text{V}$ to $3.6\text{V}$	-	-	0.8	V	
		$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	$0.3 \times V_{CC}$	V	
HIGH-level output voltage	$V_{OH}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O=-100\mu\text{A}; V_{CC}=1.65\text{V}$ to $5.5\text{V}$	$V_{CC} - 0.1$	-	-	V
			$I_O=-4\text{mA}; V_{CC}=1.65\text{V}$	0.95	-	-	V
			$I_O=-8\text{mA}; V_{CC}=2.3\text{V}$	1.7	-	-	V
			$I_O=-12\text{mA}; V_{CC}=2.7\text{V}$	1.9	-	-	V
			$I_O=-24\text{mA}; V_{CC}=3.0\text{V}$	2.0	-	-	V
			$I_O=-32\text{mA}; V_{CC}=4.5\text{V}$	3.4	-	-	V
LOW-level output voltage	$V_{OL}$	$V_I = V_{IH}$ or $V_{IL}$	$I_O=100\mu\text{A}; V_{CC}=1.65\text{V}$ to $5.5\text{V}$	-	-	0.10	V
			$I_O=4\text{mA}; V_{CC}=1.65\text{V}$	-	-	0.70	V
			$I_O=8\text{mA}; V_{CC}=2.3\text{V}$	-	-	0.45	V
			$I_O=12\text{mA}; V_{CC}=2.7\text{V}$	-	-	0.60	V
			$I_O=24\text{mA}; V_{CC}=3.0\text{V}$	-	-	0.80	V
			$I_O=32\text{mA}; V_{CC}=4.5\text{V}$	-	-	0.80	V
input leakage current	$I_I$	$V_I=5.5\text{V}$ or GND; $V_{CC}=0\text{V}$ to $5.5\text{V}$	-	-	$\pm 4$	$\mu\text{A}$	
OFF-state output current	$I_{OZ}$	$V_I=V_{IH}$ or $V_{IL}; V_O=5.5\text{V}$ or GND; $V_{CC}=3.6\text{V}$	-	-	$\pm 4$	$\mu\text{A}$	
power-off leakage current	$I_{OFF}$	$V_I$ or $V_O=5.5\text{V}; V_{CC}=0\text{V}$	-	-	$\pm 4$	$\mu\text{A}$	
supply current	$I_{CC}$	$V_I=5.5\text{V}$ or GND; $I_O=0\text{A};$ $V_{CC}=1.65\text{V}$ to $5.5\text{V}$	-	-	4	$\mu\text{A}$	
additional supply current	$\Delta I_{CC}$	per pin; $V_I=V_{CC}-0.6\text{V}; I_O=0\text{A};$ $V_{CC}=2.3\text{V}$ to $5.5\text{V}$	-	-	500	$\mu\text{A}$	

Note: All typical values are measured at  $V_{CC}=3.3\text{V}$  and  $T_{amb}=25^{\circ}\text{C}$ .



### 3.3.3、AC Characteristics 1

( $T_{amb}=-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ. <sup>[1]</sup>	Max.	Unit	
A to Y propagation delay	$t_{PLH}, t_{PHL}$	see Figure 3	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	9.9	14.9	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	6.6	9.9	ns
			$V_{CC}=2.7\text{V}$	-	7.5	11.3	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	6.3	9.5	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	5.1	7.7	ns
$\overline{\text{OE}}$ to Y enable time	$t_{PZH}, t_{PZL}$	see Figure 4	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	12.3	18.5	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	8.4	12.6	ns
			$V_{CC}=2.7\text{V}$	-	9.9	14.9	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	7.2	10.8	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	6.3	9.5	ns
$\overline{\text{OE}}$ to Y disable time	$t_{PLZ}, t_{PHZ}$	see Figure 4	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	12.9	19.4	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	8.1	12.2	ns
			$V_{CC}=2.7\text{V}$	-	9.0	13.5	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	9.3	14.0	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	6.6	9.9	ns

Note:

[1] Typical values are measured at  $T_{amb}=25^{\circ}\text{C}$  and  $V_{CC}=1.8\text{V}, 2.5\text{V}, 2.7\text{V}, 3.3\text{V}$  and  $5.0\text{V}$  respectively.

### 3.3.4、AC Characteristics 2

( $T_{amb}=-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , voltages are referenced to GND (ground=0V), unless otherwise specified.)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	
A to Y propagation delay	$t_{PLH}, t_{PHL}$	see Figure 3	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	19.5	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	12.6	ns
			$V_{CC}=2.7\text{V}$	-	-	14.3	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	-	12.6	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	10.5	ns
$\overline{\text{OE}}$ to Y enable time	$t_{PZH}, t_{PZL}$	see Figure 4	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	23.6	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	16.2	ns
			$V_{CC}=2.7\text{V}$	-	-	19.1	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	-	14.3	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	12.3	ns
$\overline{\text{OE}}$ to Y disable time	$t_{PLZ}, t_{PHZ}$	see Figure 4	$V_{CC}=1.65\text{V}$ to $1.95\text{V}$	-	-	25.2	ns
			$V_{CC}=2.3\text{V}$ to $2.7\text{V}$	-	-	15.8	ns
			$V_{CC}=2.7\text{V}$	-	-	17.6	ns
			$V_{CC}=3.0\text{V}$ to $3.6\text{V}$	-	-	18.1	ns
			$V_{CC}=4.5\text{V}$ to $5.5\text{V}$	-	-	13.0	ns





## 4、Testing Circuit

### 4.1、AC Testing Circuit

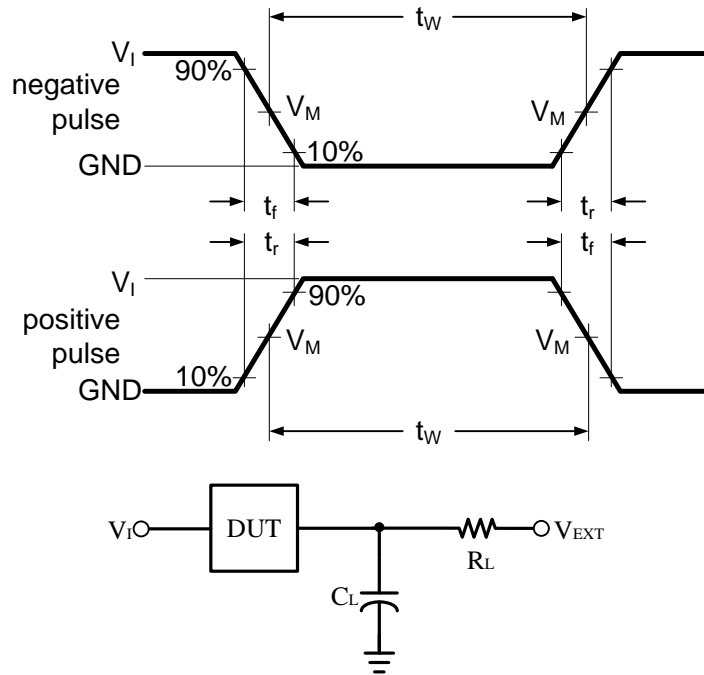


Figure 2. Load circuit

$C_L$  includes probe and jig capacitance.

### 4.2、AC Testing Waveforms

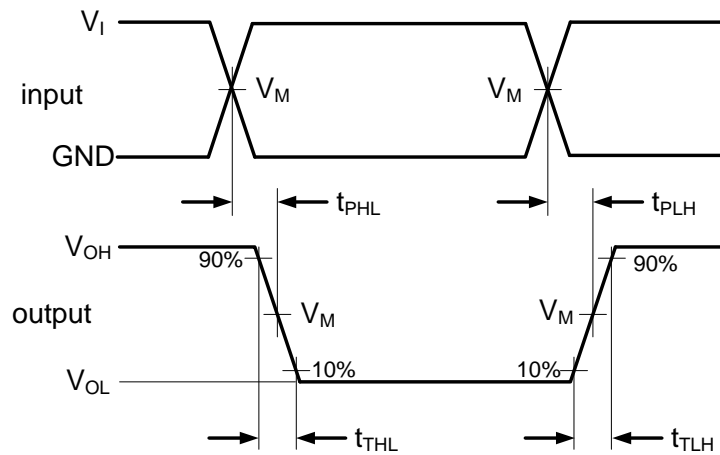


Figure 3. The input A to output Y propagation delay times

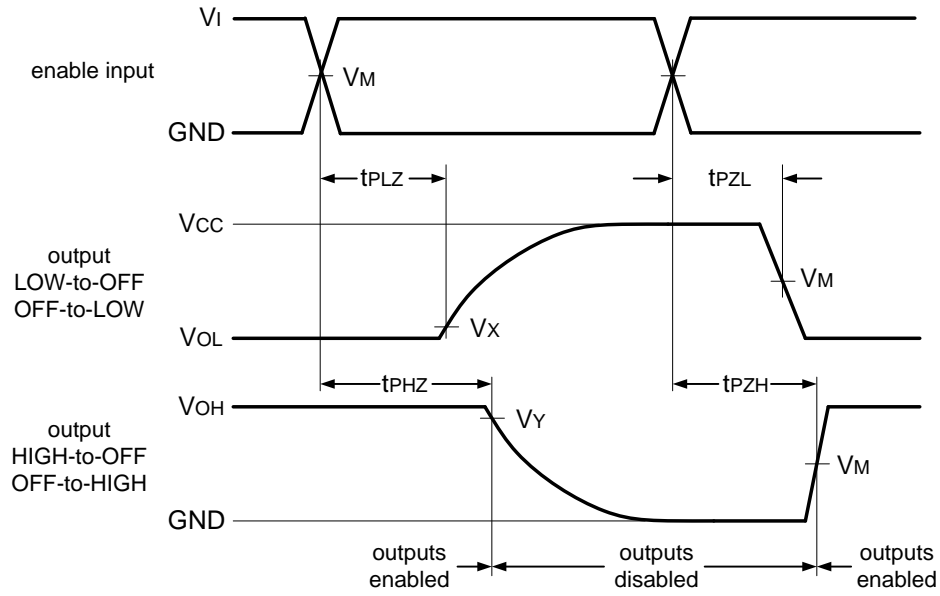


Figure 4. 3-state enable and disable times

### 4.3. Measurement Points

Supply voltage	Input	Output		
$V_{CC}$	$V_M$	$V_M$	$V_X$	$V_Y$
1.65V to 1.95V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
2.3V to 2.7V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
2.7V	1.5V	1.5V	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$
3.0V to 3.6V	1.5V	1.5V	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$
4.5V to 5.5V	$0.5 \times V_{CC}$	$0.5 \times V_{CC}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$


### 4.4. Test Data

Supply voltage	Input		Load		$V_{EXT}$		
$V_{CC}$	$V_I$	$t_r, t_f$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$	$t_{PZH}, t_{PHZ}$	$t_{PZL}, t_{PLZ}$
1.65V to 1.95V	$V_{CC}$	$\leq 3ns$	30pF	1k $\Omega$	open	GND	$2 \times V_{CC}$
2.3V to 2.7V	$V_{CC}$	$\leq 3ns$	30pF	500 $\Omega$	open	GND	$2 \times V_{CC}$
2.7V	2.7V	$\leq 3ns$	50pF	500 $\Omega$	open	GND	6V
3.0V to 3.6V	2.7V	$\leq 3ns$	50pF	500 $\Omega$	open	GND	6V
4.5V to 5.5V	$V_{CC}$	$\leq 3ns$	50pF	500 $\Omega$	open	GND	$2 \times V_{CC}$



## 5、Package Information


### 5.1、SOT-23-5

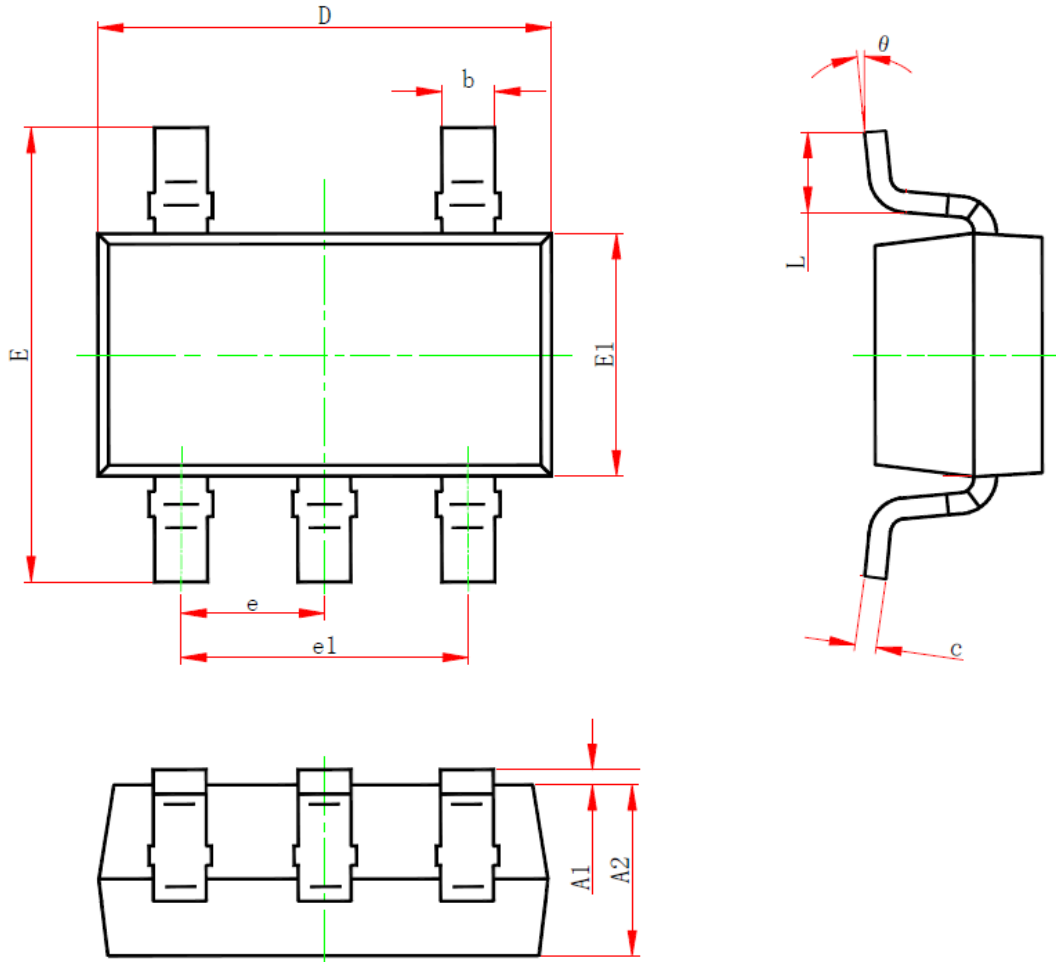

Symbol	Dimensions (mm)	
	Min.	Max.
A1	0.00	0.12
A2	1.00	1.20
b	0.30	0.50
c	0.10	0.20
D	2.82	3.02
E	2.60	3.00
E1	1.50	1.70
e	0.95	
e1	1.80	2.00
L	0.30	0.60
$\theta$	0°	8°




## 5.2、SOT-353

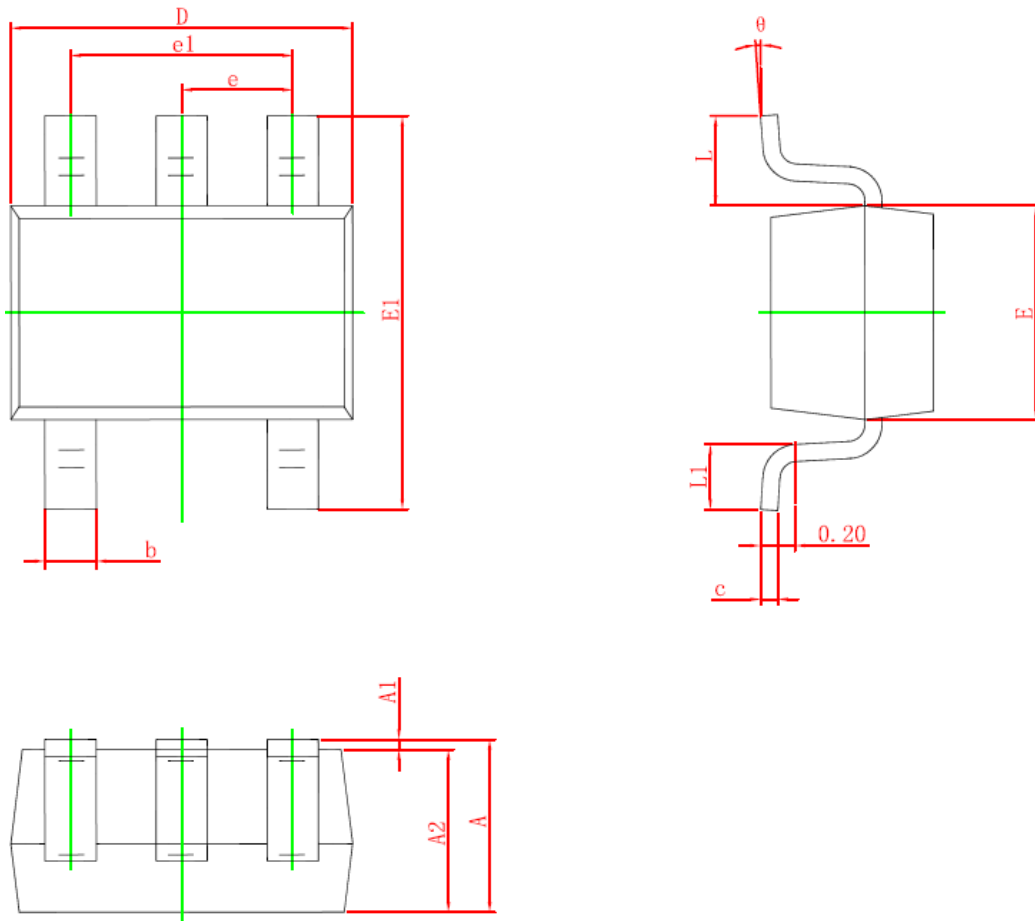

Symbol	Dimensions (mm)	
	Min.	Max.
A	0.90	1.10
A1	0.00	0.10
A2	0.90	1.00
b	0.15	0.35
c	0.11	0.175
D	2.00	2.20
E	1.15	1.35
E1	2.15	2.45
e	0.65	
e1	1.20	1.40
L	0.525	
L1	0.26	0.46
$\theta$	0°	8°



## 5.3、XSON6(1\*1\*0.45-0.35)

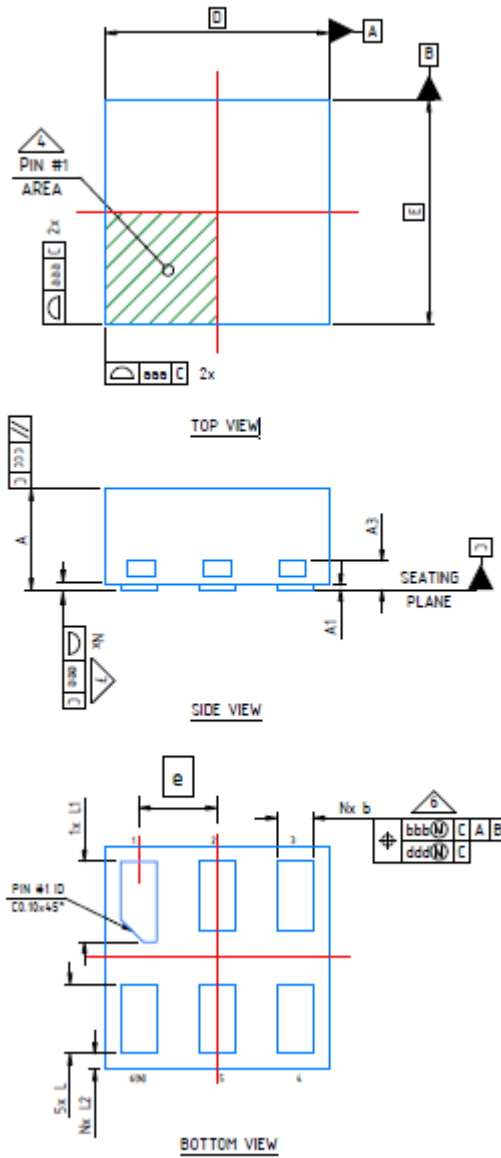

Symbol	Dimensions (mm)	
	Min.	Max.
A	0.41	0.50
A1	0.00	0.05
A3	0.127	
b	0.11	0.21
D	1.00	
E	1.00	
e	0.35	
L	0.26	0.36



# Wuxi I-CORE Electronics Co., Ltd.

Tab: 835-12-B4

Number: AiP74LVC1G125-AX-LJ-B008EN

L1	0.31	0.41
L2	0.02	0.12



## 6、 Statements And Notes

### 6.1、 The name and content of Hazardous substances or Elements in the product

Part name	Hazardous substances or Elements									
	Lead and lead compounds	Mercury and mercury compounds	Cadmium and cadmium compounds	Hexavalent chromium compounds	Polybrominated biphenyls	Polybrominated biphenyl ethers	Dibutyl phthalate	Butylbenzyl phthalate	Di-2-ethylhexyl phthalate	Diisobutyl phthalate
Lead frame	○	○	○	○	○	○	○	○	○	○
Plastic resin	○	○	○	○	○	○	○	○	○	○
Chip	○	○	○	○	○	○	○	○	○	○
The lead	○	○	○	○	○	○	○	○	○	○
Plastic sheet installed	○	○	○	○	○	○	○	○	○	○
explanation	○: Indicates that the content of hazardous substances or elements in the detection limit of the following the SJ/T11363-2006 standard. ×: Indicates that the content of hazardous substances or elements exceeding the SJ/T11363-2006 Standard limit requirements.									

### 6.2、 Notes

We Recommend you to read this chapter carefully before using this product.

The information in this chapter is provided for reference only and i-Core disclaims any express or implied warranties, including but not limited to applicability, special application or non-infringement of third party rights.

This product is not suitable for critical equipment such as life-saving, life-sustaining or safety equipment. It is also not suitable for applications that may result in personal injury, death, or serious property or environmental damage due to product malfunction or failure. I-Core will not be liable for any damages incurred by the customers at their own risk for such applications.

The customer is responsible for conducting all necessary tests i-Core's application to avoid failure in the application or the application of the customer's third party users. I-Core does not accept any liability.

The Company reserves the right to change or improve the information published in this chapter at any time. The information in this chapter are subject to change without notice. We recommend the customer to consult our sales staff before purchasing.

Please obtain related materials form i-Core's regular channels and we are not responsible for its content if it is provided by sources other than our company.

In case of any conflict between the Chinese and English version, the version is subject to the Chinese one.